



NOTES:

1. DDCVA'S MUST CONFORM TO STATE & LOCAL SPECIFICATIONS.
2. APPROVED DDCVA INCLUDES SHUT-OFF VALVES #1 AND #2 AS PART OF THE UNIT. NO SUBSTITUTIONS SHALL BE PERMITTED. 6" CLEARANCE SHALL BE WITH VALVE OPEN.
3. FIRE LINE INSTALLATIONS SHALL HAVE OUTSIDE STEM AND YOKE (OS&Y) HANDWHEEL OPERATORS.
4. VAULT, DOORS, OR COVERS AND SUPPORT ASSEMBLY SHALL BE DESIGNED BY OWNER AS REQUIRED.
5. TEST COCK #1 SHALL BE UPSTREAM OF SHUT-OFF VALVE #1 AND IS PART OF ASSEMBLY.
6. IF DRAINAGE CANNOT BE PROVIDED TO FREE ATMOSPHERE OR STORM DRAINAGE, THE DDCVA SHALL BE INSTALLED ABOVE GROUND.
7. DRAINAGE MAY BE PROVIDED AS SHOWN OR AS FLOOR DRAIN.


REVISIONS		
NO	DATE	DESCRIPTION



The Good Life

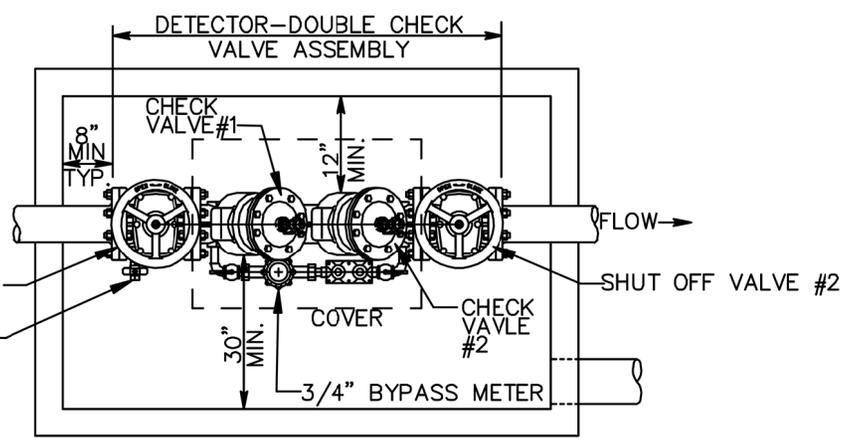

PLAN VIEW
N.T.S.

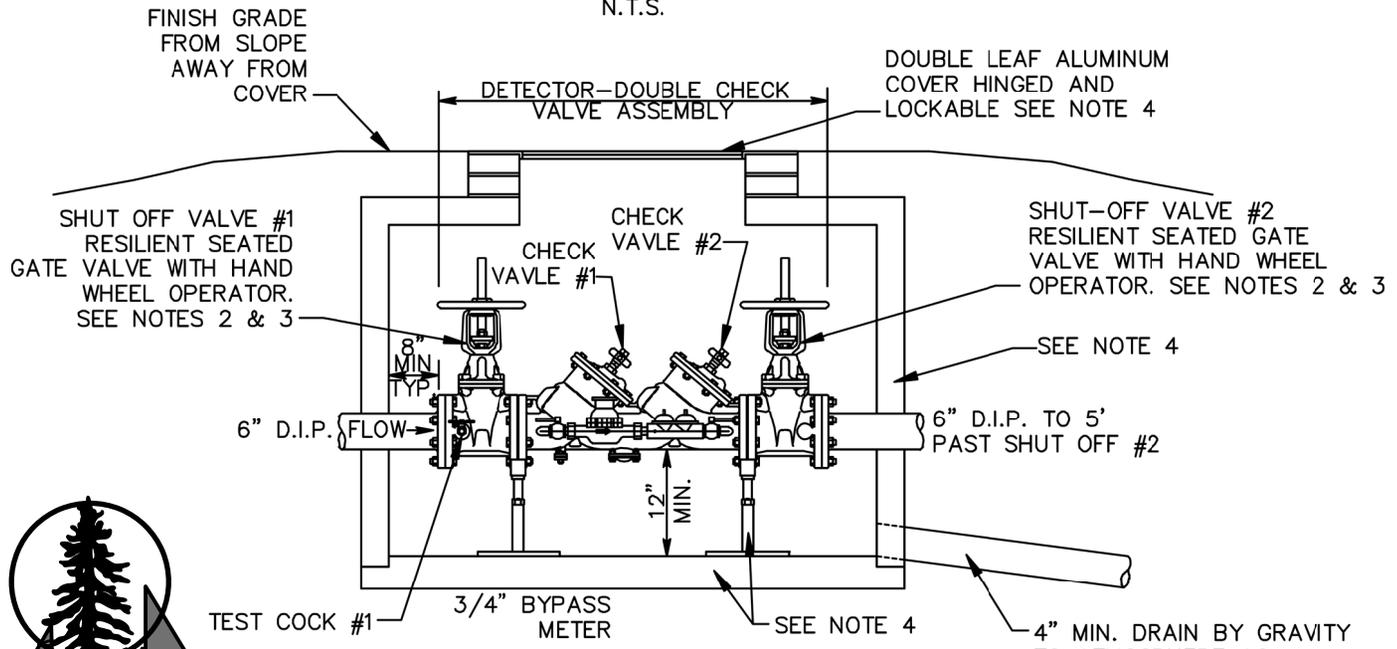

ELEVATION
N.T.S.

CITY OF TEGA CAY
LAND DEVELOPMENT
STANDARDS

DOUBLE-DETECTOR CHECK VALVE ASSEMBLY

STD. NO	REV