



NOTES:



1. DCVA MUST CONFORM TO SCDHEC SPECIFICATIONS FOR BACKFLOW PREVENTION ASSEMBLIES 3/4", 1" & 2".
2. APPROVED DCVA'S INCLUDE SHUT OFF VALVE #1 AND #2.
3. COVERS AND SUPPORT OF ASSEMBLY SHALL BE DESIGNED BY OWNER AS REQUIRED.
4. IF DRAINAGE CANNOT BE PROVIDED TO FREE ATMOSPHERE OR STORM DAMAGE, THE DCVA'S SHALL BE INSTALLED ABOVE GROUND.
5. TEST COCK #1 SHALL BE UPSTREAM OF SHUT OFF VALVE #1 AND IS PART OF THE APPROVED ASSEMBLY. ALL TEST COCKS MUST BE ON ONE SIDE OR TOP. ASSEMBLIES SHALL BE INSTALLED UPRIGHT AND IN THE HORIZONTAL POSITION.
6. DRAIN MAY BE PROVIDED AS SHOWN OR AS FLOOR DRAIN.
7. ALL TESTING MUST BE DONE BY A STATE CERTIFIED BACKFLOW PREVENTION TESTER.
8. INITIAL BACKFLOW DEVICE TEST REPORT MUST BE SUBMITTED TO CITY OF TEGA CAY PRIOR TO METER ACTIVATION.

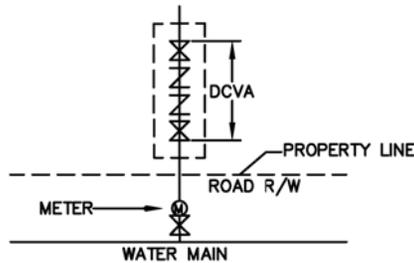

*The Good Life*

REVISIONS

NO	DATE	DESCRIPTION

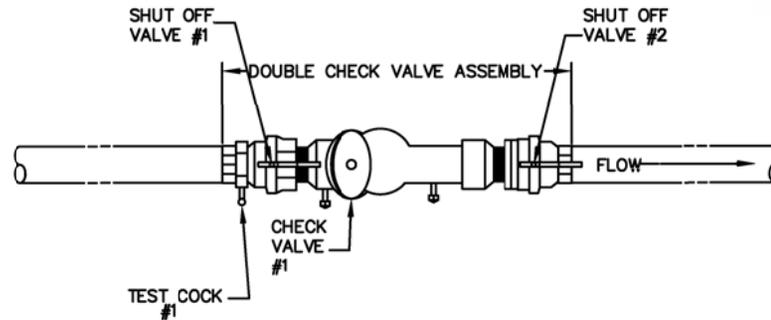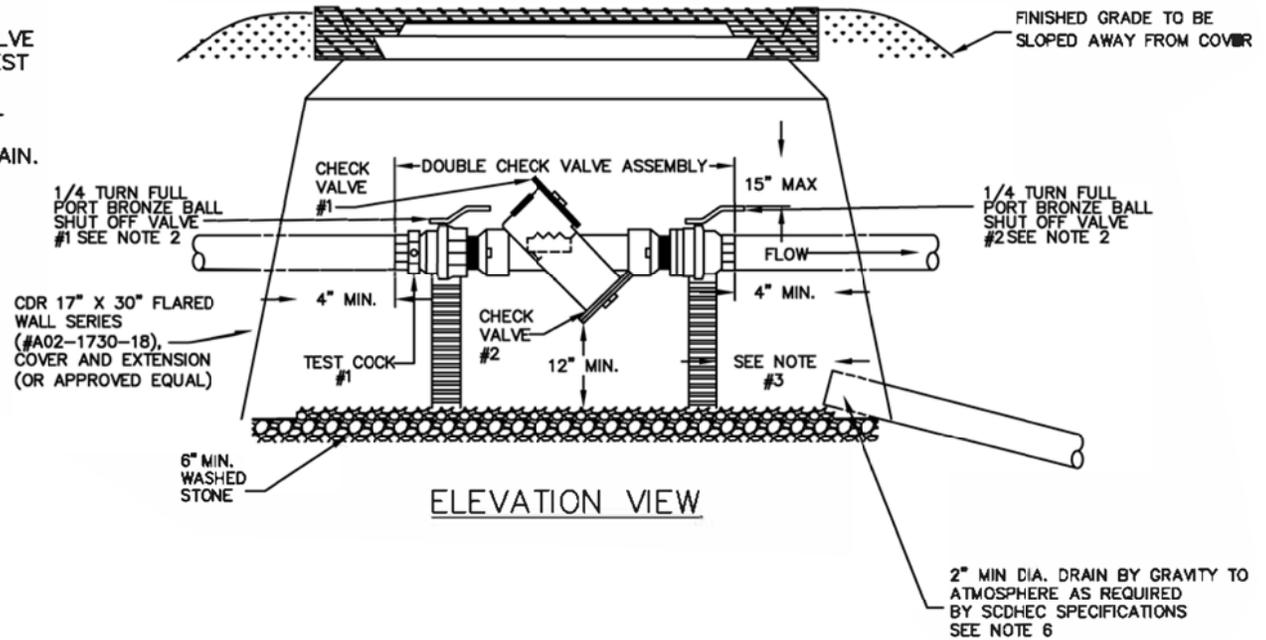

CITY OF TEGA CAY  
LAND DEVELOPMENT  
STANDARDS

DOUBLE CHECK VALVE ASSEMBLY  
3/4", 1" & 2" BELOW GROUND

STD. NO	REV