


NOTE:

SERVICE LINE MUST ENTER MANHOLE AT ANGLE NO GREATER THAN 90° DIRECTION OF FLOW.

PLAN


CORE APPROPRIATE SIZE HOLE, INSTALL STANDARD MANHOLE BOOT AND FINISH PER REQUIREMENTS FOR MAINLINE CONNECTIONS

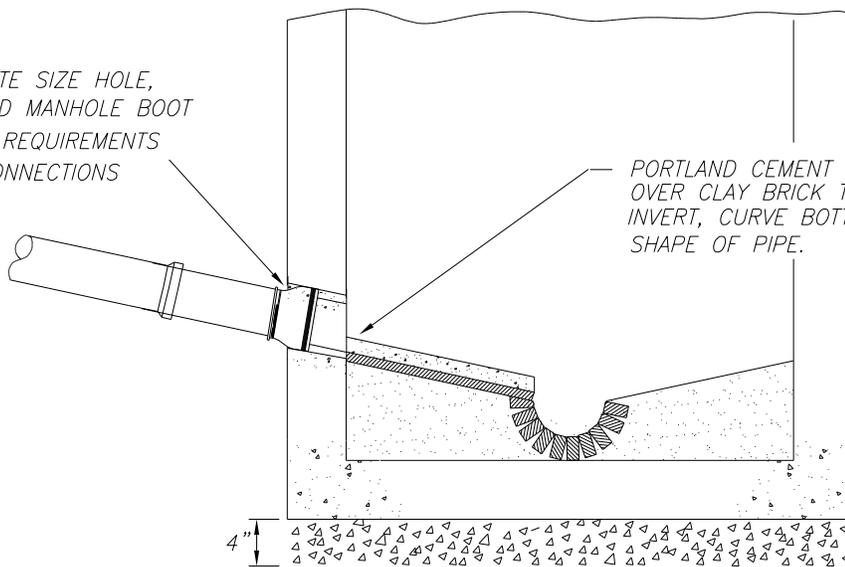

PORTLAND CEMENT MORTAR SMOOTHED OVER CLAY BRICK TO FORM SIDES OF INVERT, CURVE BOTTOM & SIDES TO SHAPE OF PIPE.

IF SLOPE OF TABLE IS LESS THAN 2 1/2" PER FT., THEN THE INVERT OF THE SERVICE LINE SHALL ENTER MANHOLE 6" ABOVE TABLE AND A SERVICE INVERT SHALL BE FORMED ON THE TABLE. OTHERWISE, THE SERVICE SHALL ENTER AT TOP OF TABLE.

SECTION



The Good Life

CITY OF TEGA CAY
LAND DEVELOPMENT
STANDARDS

SERVICE LINE
TAP TO
MANHOLE

SCALE: N.T.S.
REVISION DATE: 10/3/16